

SPRINKLER

Self-priming centrifugal pumps

 Clean water

 Domestic use

 Civil use



PERFORMANCE RANGE

- Flow rate up to **400 l/min** (24.0 m³/h)
- Head up to **36 m**

APPLICATION LIMITS

- Manometric suction lift up to **9 m** (HS)
- Liquid temperature between **-10 °C** and **+40 °C**
- Ambient temperature up to **+40 °C**
- Max. working pressure **10 bar**
- Continuous service **S1**

CONSTRUCTION AND SAFETY STANDARDS

EN 60335-1
IEC 60335-1
CEI 61-150

EN 60034-1
IEC 60034-1
CEI 2-3



CERTIFICATIONS

Company with management system certified DNV
ISO 9001: QUALITY

INSTALLATION AND USE

Suitable for use with clean water and with liquids that are not chemically aggressive towards the materials from which the pump is made.

The self-priming **SPRINKLER** pumps are designed to pump water even in cases where air is present. Because of their reliability and the fact that they are easy to use, they are recommended for use in domestic and civil applications such as the distribution of water in combination with pressure tanks, and for the irrigation of gardens and orchards, etc.

Installation needs to be undertaken in well ventilated closed areas or anyway protected from bad weather.

OPTIONS AVAILABLE ON REQUEST


- Pump body with NPT ANSI B 1.20.1 threaded ports
- Other voltages
- IPX5 protection

GUARANTEE

2 years subject to terms and conditions

CHARACTERISTIC CURVES AND PERFORMANCE DATA

60 Hz n = 3450 min⁻¹ HS = 0 m

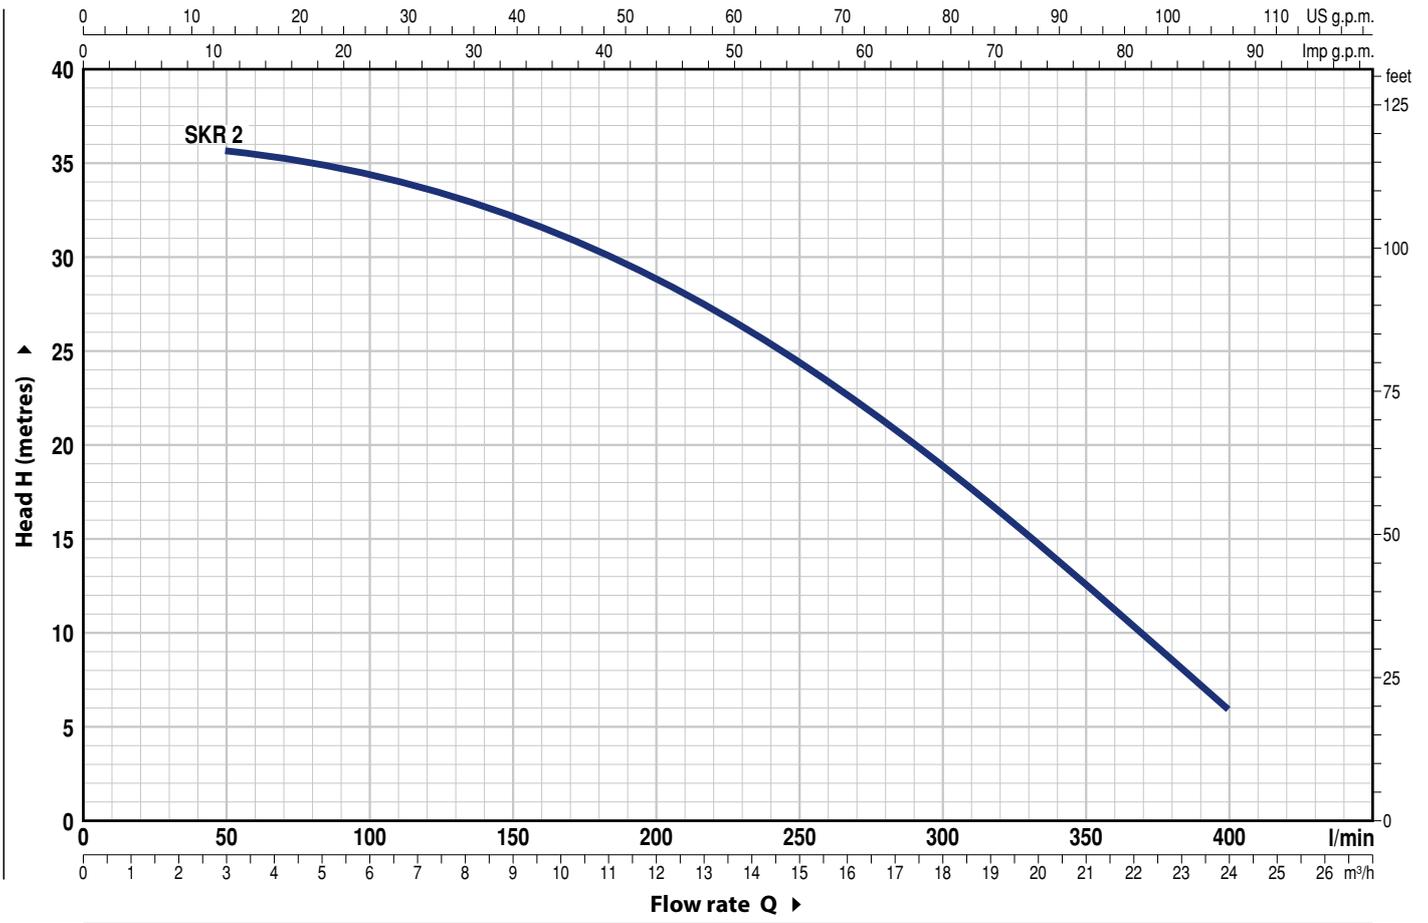


MODEL		POWER (P ₂)			Q	Flow rate												
Single-phase	Three-phase	kW	HP	▲		0	3.0	6.0	9.0	12.0	15.0	18.0	21.0	24.0				
					l/min	0	50	100	150	200	250	300	350	400				
SKRm 2	SKR 2	1.5	2	IE3	H metres	36	35.5	34.5	32	29	24.5	19	12.5	6				

Q = Flow rate H = Total manometric head HS = Suction height

Tolerance of characteristic curves in compliance with EN ISO 9906 Grade 3B.


▲ Three-phase motor efficiency class (IEC 60034-30-1)

STANDARD INSTALLATION

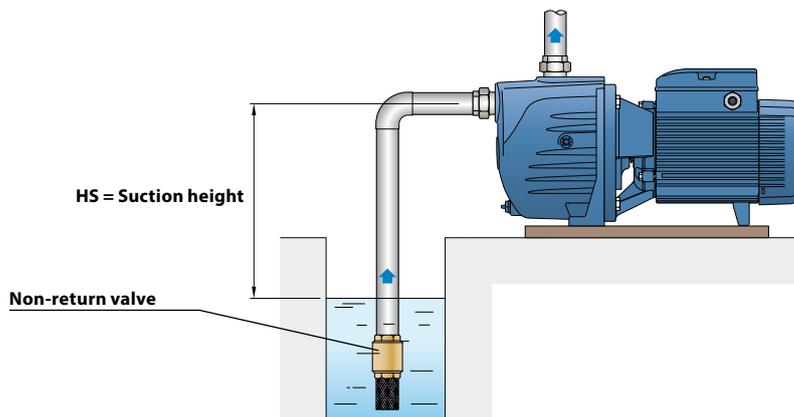


SPRINKLER

POS.	COMPONENT	CONSTRUCTION CHARACTERISTICS				
1	PUMP BODY	Cast iron with an Epoxy Electro Coating treatment, with threaded ports in compliance with ISO 228/1				
2	BODY BACKPLATE	Cast iron with an Epoxy Electro Coating treatment				
3	DIFFUSER	Noryl				
4	IMPELLER	Noryl				
5	MOTOR SHAFT	Stainless steel AISI 431				
6	MECHANICAL SEAL	Seal	Shaft	Materials		
		<i>Model</i>	<i>Diameter</i>	<i>Stationary ring</i>	<i>Rotational ring</i>	<i>Elastomer</i>
		FN-18	Ø 18 mm	Graphite	Ceramic	NBR
7	BEARINGS	6204 ZZ / 6204 ZZ				
8	CAPACITOR	Pump	Capacitance			
		<i>Single-phase</i>	<i>(220 V)</i>	<i>(110 V or 127 V)</i>		
		SKRm 2	50 µF - 450 VL	80 µF - 250 VL		
9	ELECTRIC MOTOR	SKRm: single-phase 220 V - 60 Hz with thermal overload protector incorporated into the winding. SKR: three-phase 220/380 V - 60 Hz or 220/440 V - 60 Hz. ⇒ The three-phase pumps are fitted with high performance motors in class IE3 (IEC 60034-30-1) – Insulation: class F – Protection: IP X4				

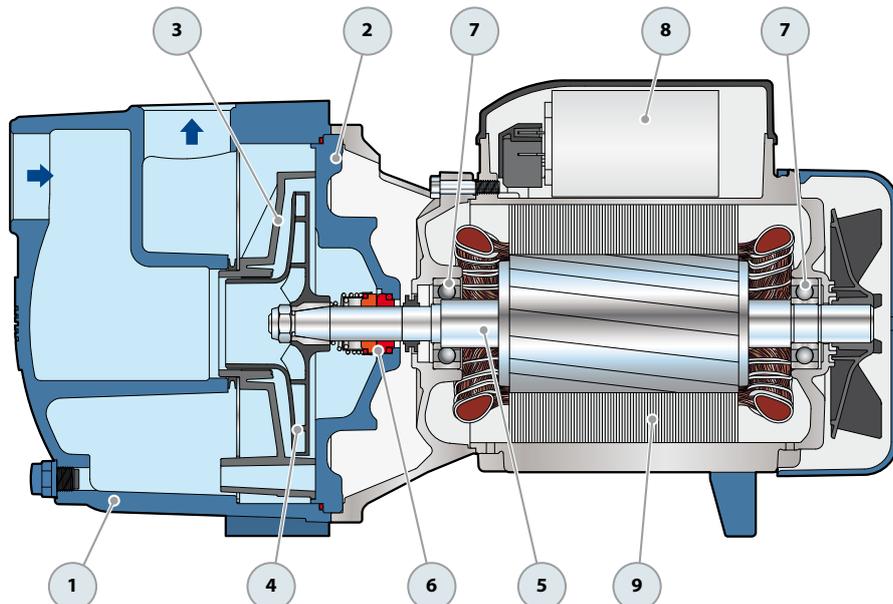

DIMENSIONS AND WEIGHT

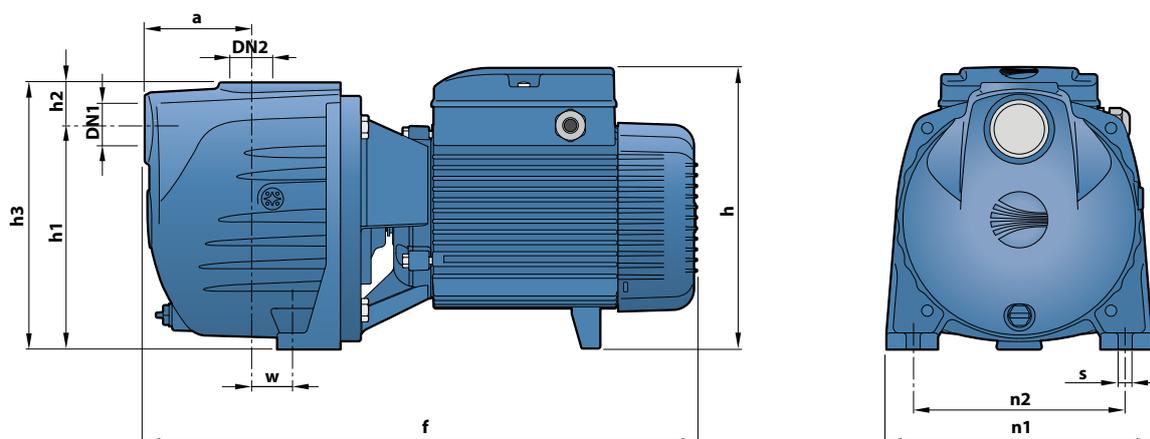

MODEL		PORTS		DIMENSIONS mm										kg	
Single-phase	Three-phase	DN1	DN2	a	f	h	h1	h2	h3	n1	n2	w	s	1~	3~
SKRm 2	SKR 2	1½" NPT	1½" NPT	91	465	241	186	39	225	223	178	37.5	11	26.9	26.9

ABSORPTION

MODEL	VOLTAGE		
Single-phase	220 V	110 V	115 V
SKRm 2	11.0 A	22.0 A	19.1 A

MODEL	VOLTAGE			
Three-phase	220 V	380 V	220 V	440 V
SKR 2	7.1 A	4.1 A	6.2 A	3.4 A

PALLETIZATION

MODEL		GROUPAGE	CONTAINER
Single-phase	Three-phase	n. pumps	n. pumps
SKRm 2	SKR 2	35	49